RIVERBANK ACOUSTICAL LABORATORIES

Alion Science and Technology

TEST REPORT

1512 S. BATAVIA AVENUE GENEVA, ILLINOIS 60134 630/232-0104 FOUNDED 1918 BY WALLACE CLEMENT SABINE

FOR: Panelfold, Inc.

ON: Panelfold Operable Wall

Sound Transmission Loss Test RALTM-TL02-365

Page 1 of 3

RESULT: STC 52

CONDUCTED: 13 December 2002

TEST METHOD

Unless otherwise designated, the measurements reported below were made with all facilities and procedures in explicit conformity with the ASTM Designations E90-02 and E413-87, as well as other pertinent standards. Riverbank Acoustical Laboratories has been accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) for this test procedure. A description of the measuring technique is available separately.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as a Panelfold operable wall. The specimen was fully operable and was comprised of interlocking panels arranged in a flat configuration and supported by an overhead track. The nominally 108 mm (4.25 in.) thick panels were constructed of high density faces with metal frames and interior sound retarding material. The abutting edges between panels consisted of interlocking vertical stiles incorporating vertical sound seals. A continuous vinyl seal installed on each side of each panel closed the clearance between the top of the panels and the soffit. A mechanical seal in each panel closed the clearance between the bottom of the panels and the floor. An expanding panel provided final closure. The manufacturer installed the specimen directly into the laboratory's 4.27 m (14 ft) wide by 2.74 m (9 ft) high wood-lined frame. Each panel was 108 mm (4.25 in.) thick by 1.27 m (50 in.) wide by 2.59 m (102 in.) high including seals. Each panel weighed an average of 123 kg (270 lbs), or 36.6 kg/m^2 (7.5 lbs/ft²), including trolley. The expanding panel was nominally 330 mm (13 in.) wide by 2.59 m (102 in.) high and weighed 96.6 kg (213 lbs). The overall dimensions of the test specimen installed and tested as measured were 4.27 m (168 in.) wide by 2.57 m (101 in.) high and nominally 108 mm (4.25 in.) thick. The weight of the entire specimen as measured was 517 kg (1,140 lbs), an average of 47.4 kg/m² (9.7 lbs/ft²). The transmission area used in the calculations was 11 m^2 (118 ft²). The source and receiving room temperatures at the time of the test were 21±1°C (71±2°F) and 59±2% relative humidity. The source and receive reverberation room volumes were 179 m³ (6,298 ft³) and 177 m³ (6,255 ft³), respectively. Laboratory personnel performed a full inspection on the test specimen. A detailed description is on file and has been intentionally withheld from this report in order that the manufacturer may control full proprietary rights regarding its product. The operable wall was opened and closed at least five times, and the test was conducted with no further adjustments.

This report shall not be reproduced except in full, without the written approval of RAL. THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS. THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.



Alion Science and Technology

TEST REPORT

1512 S. BATAVIA AVENUE GENEVA, ILLINOIS 60134

630/232-0104 FOUNDED 1918 BY WALLACE CLEMENT SABINE

Panelfold, Inc.

13 December 2002

RALTM-TL02-365

Page 2 of 3

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The precision of the TL test data is within the limits set by the ASTM Standard E90-02.

FREQ.	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>
100	28	1.06		800	54	0.14	
125	36	0.57		1000	56	0.19	
160	35	0.99	4	1250	56	0.13	
200	39	0.64	3	1600	58	0.17	
250	42	0.52	3	2000	60	0.14	
315	44	0.40	4	2500	61	0.17	
400	46	0.23	5	3150	61	0.14	
500	47	0.28	5	4000	63	0.10	
630	52	0.21	1	5000	65	0.11	

STC=52

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ, (cps)

T.L. = TRANSMISSION LOSS, dB

Dean Victor

- C.L. = UNCERTAINTY IN dB, FOR A 95% CONFIDENCE LIMIT
- DEF. = DEFICIENCIES, dB<STC CONTOUR
- STC = SOUND TRANSMISSION CLASS

Senior Experimentalist

Tested by

Approved by_

David L. Moyer Laboratory Manager

This report shall not be reproduced except in full, without the written approval of RAL. THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.

> ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS. THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.




This electronic copy of this report is provided as a courtesy by the issuing

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE GENEVA, ILLINOIS 60134 Alion Science and Technology

630/232-0104 FOUNDED 1918 BY WALLACE CLEMENT SABINE



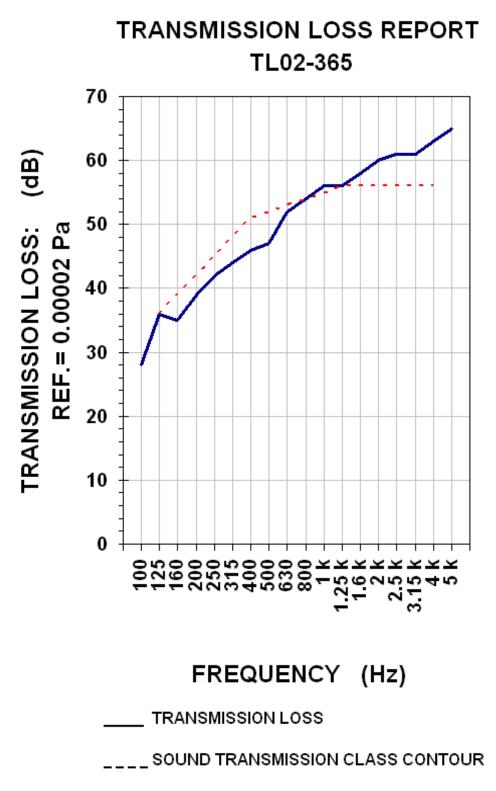

This report shall not be reproduced except in full, without the written approval of RAL. THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS. THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.