

Tek-Wall 1001
397670

High Performance
Wallcovering



241 Angora



002 Milk



243 Bouillon



003 Muslin




195 Linen Mist



179 Mintless



011 Bisque

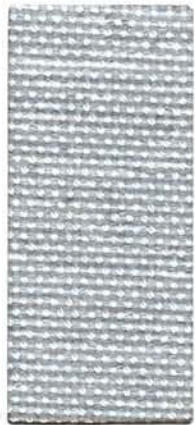

162 Dove Grey



210 Brushed Aluminum




226 Buttercreme



183 Biscuit Beige



257 Nougat

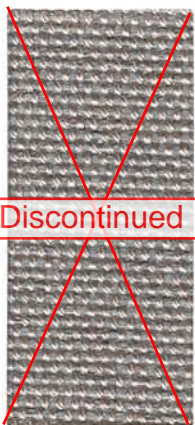

217 Pewter



223 Sisal



015 Slope



014 Barley



252 Zinc

100% Polyolefin

54" (137cm) wide

Superior Tear Resistance

Washable & Scrubbable

Reduced Environmental
Impact

maharam

Pattern	Tek-Wall 1001 397670
Application	Walls, Upholstered Walls
Content	100% Polyolefin
Finish/Backing	Stain resistant, Acrylic
Width	54" (137cm)
Flammability	Class A fire rated in accordance with ASTM-E84 tunnel test and NFPA 255, and passes NFPA 265. Complete test results are available upon request. ✨
Lightfastness	200+ hours ✨
Customs	This textile can be easily customized.
Maintenance	Clean by wiping, vacuuming, or washing with water-based cleanser or undiluted household bleach.
Note	This product is intended for use in buildings designed and maintained to avoid moisture on or within walls, particularly in warm, humid climates. All wallcovering installations must conform to manufacturer's current hanging instructions included with each shipment.
Reduced Environmental Impact	Environmentally Improved Manufacturing Process: Heavy metal free dyes, solution-dyed product. Reduced Emissions: Air quality emissions tested by Air Quality Sciences as required for listing in the Greenguard™ Environmental Institute Registry. www.greenguard.org
	© 2005 Maharam