

Vinyltex™

STANDARD VINYL WALLCOVERING COLLECTION



Panefold®
INNOVATIVE SPACE DIVISION SYSTEMS™

SAND DUNE



SURF



SAND DOLLAR




DRIFTWOOD



STORMY




CLOUDBURST

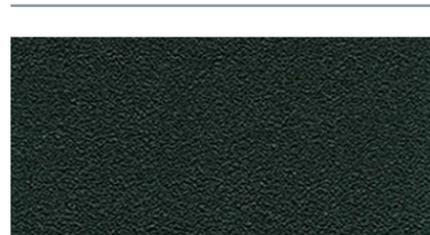


ECLIPSE

PATHWAY

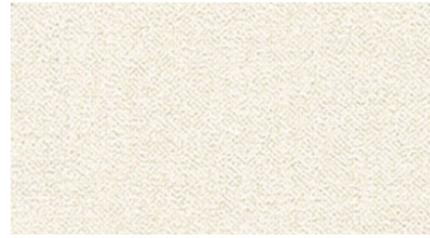

LIMESTONE

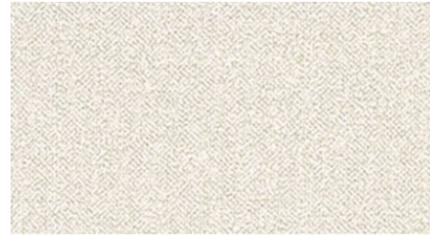

SANDSTONE



FIELDSTONE



ACORN




SLATE



BLUEGRASS*

ORNAMENTALS

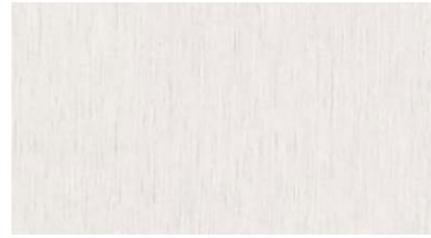

PAPERWHITE



WHEAT



HAWTHORNE



DUSTY MILLER



COFFEE BEAN



POINSETTIA*

SAVORY



VALERIAN



SESAME SEED



CARAWAY



TARO



ALLSPICE



SAGE*


ELEMENTAL



RHODIUM



BERYLLIUM

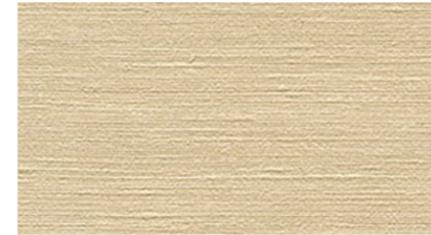


CADMIUM



GRAPHENE



BORON

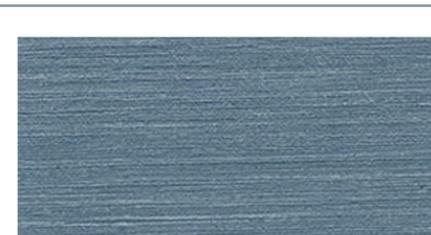

CHROMIUM*

ARTISANAL



CIABATTA



MUSHROOM



FARMSTEAD



SWEETGRASS



TRUFFLE



CABERNET*

*Please select hinge color when ordering Scale® and Sonicwal® models. See Memory Action® hinge color card.

PLEASE NOTE: Due to variation in monitor and printer color calibration, the colors shown may not display accurately. Swatch cards or individual swatches are available upon request and are recommended for color verification.

Vinyltex™

STANDARD VINYL WALLCOVERING COLLECTION

Panelfold's Vinyltex™ wallcoverings are offered as standard surfacing materials on Moduflex®, PrimeSpacer®, and Fabricwal® product models and are optional on Scale® and Sonicwal® models. The durable wallcoverings feature a clear protective coating, providing a barrier against stains and adding to the practicality of these stylish finishes. Larger finish samples are available upon request.

Total Weight:	21.0 oz. PLY / 30.0 oz. PSY
Backing:	Osnaburg
Federal Spec:	CCC-W-408D, Type II
WA Spec:	WA-101, Type II
ASTM F-793:	Category V, Type II
Fire Testing:	NFPA 101®, Life Safety Code® NFPA 255 (UL723, CAN S102M) Tunnel Test ¹ (ASTM E-84) Class A Rating NFPA 286 Corner Burn Test ² <i>Meets requirements for Flame Spread, Smoke Developed and Flashover</i>

CE Certification: EU classification in accordance with EN 15102:2007 + A1:2011

Indoor Air Quality: California 01350 – Meets emission requirements for schools and offices

¹ When applied to GRC board with A-848-B adhesive

² When applied to 5/8" type-X-gypsum board with A-848-B adhesive



OPERABLE PARTITIONS • ACCORDION PARTITIONS • RELOCATABLE PARTITIONS • FOLDING DOORS

Phone: 305-688-3501 • Fax: 305-688-0185
sales@panelfold.com • www.panelfold.com
Panelfold, Inc. PO Box 680130 Miami, Florida 33168

See our other color selections cards for additional textured vinyls, wood veneers, acoustical wall carpeting, woven fabrics and high pressure laminates available for use on Panelfold Innovative Space Division Systems.